


MODEL 8400 AMPLIFIER – APPLICATION EXAMPLE #1

STEREO INVISIBLE WHOLE HOUSE BACKGROUND MUSIC SYSTEM

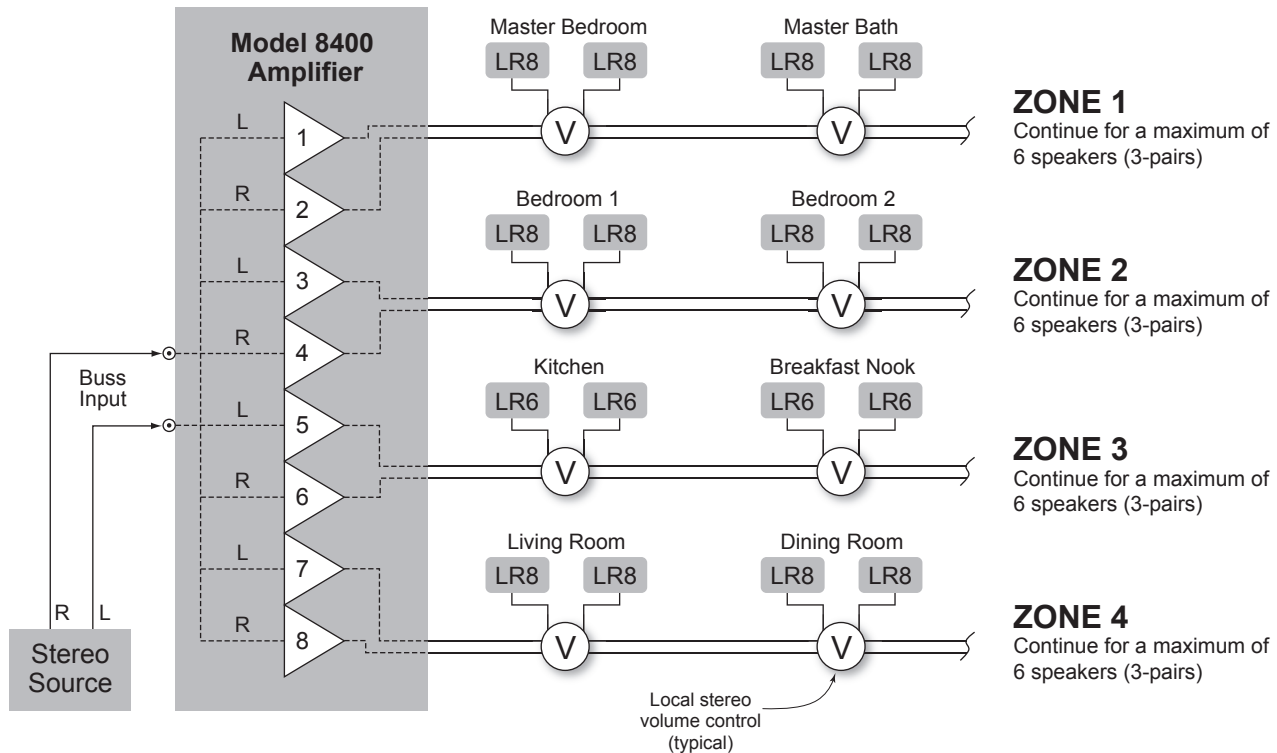

NOTES:

- Use this configuration for normal or low level listening.
- Expand to more zones using additional 8400 amplifiers, sources, speakers, etc.
- Connect stereo audio source to **BUSS INPUTS** on Model 8400.
- System provides 80W per channel per zone.
- Using front panel programming controls, select each amplifier channel and assign **BUSS INPUT L** to ODD channels; assign **BUSS INPUT R** to EVEN channels.
- Set volume on **ALL CHANNELS** to 60. For best signal to noise ratio, use source or volume control to ramp volume.
- Assign Stealth Acoustics' **OPTIMIZATION** for the specific Stealth Acoustics' speaker model being powered by an amplifier channel (For example: assign LR8 optimization to Channels 1 and 2). Do not use **OPTIMIZATION** if different speaker models are connected to an amplifier channel.
- Use **TREBLE** and **BASS** controls on each channel as desired. Avoid excessive bass or treble boost.
- Use **LOCK** feature on remote control or front panel to secure Model 8400 settings after setup.