

Two Way Totally Invisible In-Wall or In-Ceiling Loudspeaker

Recommended Applications:

Multi-Room Audio Systems
Foreground Music
Background Music
Voice Paging
Surround Sound
Masking Systems

Recommended Installations:

Flush mounted in walls or ceilings constructed of wood or steel framing with 1/2" or thicker gypsum wallboard.

Minimum 3" depth required.

Performance:

80 Watts RMS
50Hz to 20kHz (see Figure 1.)

Protection:

Two independent self-resetting circuits (low and high-frequency).

On-Site Finish Options:

Finish options include latex paint, flat finish, orange peel texture, and light plaster. Additional wall coverings include light wallpaper and light fabric.



Description:

The Stealth Acoustics model FX6 is a two-way, full-range loudspeaker system that becomes completely invisible after installation. The loudspeaker has a rigid frame which attaches directly to standard structural framing without the need for special mounting brackets. The paintable active diaphragm face is a structurally modified three layer composite consisting of two layers of graphics grade paper with a foam core. The diaphragm is bonded to the frame of the speaker panel, creating an active area surrounded by a stable mounting area. Basic installation instructions are shown on a removable cover sheet that is to be removed before taping and finishing begins. The face of the panel has been pre-primed and is ready to receive finishing materials. The edges of the panel are tapered similar to the edges of gypsum wallboard, providing the room necessary for normal wallboard tape and joint compound to be used to feather the speaker seamlessly into the wall. The FX6 loudspeaker comes equipped to match 1/2" wallboard. Shim material is provided for thicker wallboard installations. On-site finishing options include latex paint, light wallpaper, fabrics and selected texture coats. There is no need for special vellums or other nonstandard wallboard finishing materials.

The Stealth FX6 incorporates an acoustically coupled high quality, high-power 6" cone woofer and a direct coupled 25mm neo-magnet high-frequency motor. Advanced internal carbon fiber materials allow for smooth frequency extension to 20 kHz. When the FX6 is installed in standard insulated 2x4 framing and allowed to function in a full 8' stud bay, frequency response below 50 Hz can be achieved. The FX6 contains two independent protection circuits (high-frequency and low-frequency sections) that automatically reset upon reduction of excessive amplifier power.

Stealth Acoustics' invisibility offers a powerful advantage over other loudspeakers, as they can be placed wherever they sound best, free of visual concerns that may conflict with architectural features. Accompanying the full range panels, Stealth Acoustics offers the B1630, a completely invisible companion subwoofer solution for extended low frequency response. All Stealth Acoustic products are covered by a 5-year manufacturers warranty as well as an optional 15 year extended warranty. The FX6 also has 70 and 25 volt transformers available as factory installed options.

Architect and Engineering Specifications

The loudspeaker shall be a two-way, full-range device, producing frequencies from 50Hz to 20kHz. Total radiating surface shall be 117 square inches and high frequency dispersion shall be a nominal 170 degrees in both horizontal and vertical planes. The loudspeaker system shall have a sensitivity of 85 dB, 1 watt, 1 meter, with a capacity of 80 watts RMS according to EIA standard RS-426-A. The loudspeaker shall have two independent self-resetting protection devices, one each for the high-frequency driver and the low-frequency driver.

The loudspeaker shall fit into standard wood or steel stud construction with a minimum 3-1/2" depth cavity. The loudspeaker shall mount directly to the structural framing and have the capability of seamlessly adjoining 1/2" or thicker gypsum wallboard. The minimum distance between framing members shall be 8-1/2". Front panel finishing methods shall be consistent with normal gypsum wallboard finishing techniques and may include latex paint, light wallpaper, light fabric and approved select texture finishes.

The loudspeaker shall be the Stealth Acoustics model FX6 and shall carry a 5-year manufacturer's warranty.



Rear View

Specifications

Frequency Response

50Hz to 20kHz (see Figure 1.)

Power Capacity

80 Watts RMS

Protection

2 Independent self-resetting devices (LF and HF)

Sensitivity

85db 1 W / 1 Meter

Driver Components

High Frequency: 25mm Neodymium Motor
 Low-Frequency: 1" Voice Coil, 6" Woofer, Ceramic 20oz Magnet

System Impedance

8 ohms nominal

Polar Dispersion

170 degrees Vertical and Horizontal

Dimensions

15-7/8" (403mm) Wide

11-7/8" (302mm) High

3" (76.2mm) Deep, measured from back side of mounting flange to back of woofer magnet.

Finish

Paint ready, graphic arts grade paper.

Product Weight

8.5 Lbs. (3.8 kg)

Shipping Weight

20 Lbs. (9.2 kg) - shipped in pairs

Included Accessories

1/8" shims for 5/8" drywall installations
 Mounting Screws

Optional Accessories

PS-6 Place Saver
 F6BX MDF Acoustic Back Box
 MBX-22 UL Listed Metal Back Box
 SK-1 Shim Kit
 Constant Voltage Transformers
 Extended Warranty - 15 year

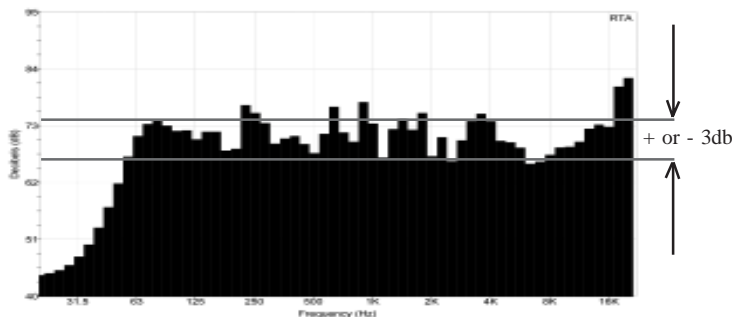


Figure 1 - On-Axis Frequency Response, in standard studwall, with 4 coats of latex paint applied to the face of the speaker panel.

Stealth Acoustics

A Division of
 Dimensional Communications
 1220 Anderson Road
 Mount Vernon, WA 98274
www.stealthacoustics.com
 (888) 865-6800
 (360) 424-8872 FAX