

## TWO-WAY CUSTOMIZABLE ON-WALL LOUDSPEAKER

### Recommended Applications:

TV Sound Improvement  
Background / Foreground Music

### Installation:

Installs on-wall in minutes with provided Slim-mounts™.

### Performance:

200 Watts RMS  
40Hz to 20kHz (see Figure 1)  
80W minimum recommended power

### Finish Options:

Available in three levels of finish:

1. *Satin White* - Ready to install right out of the box, or finish in the field with paint, wallpaper or fabric to perfectly match any room's décor.
2. *Image Wrap™* - Choose from our gallery of images or a customer supplied image for a professional studio-wrap over the speaker.
3. *The Trilogy™* - Order the Image II speakers with a matching Stealth CoverArt™ display masking system. CoverArt™ and The Trilogy™ available in the USA and Canada only.



Rear view



Front view (shown with optional Image Wrap™)



*The Trilogy™* - Image II speakers shown with matching Stealth CoverArt™ display masking system. CoverArt™ and The Trilogy™ available in the USA and Canada only.

## Image Series

CUSTOMIZABLE ON-WALL SPEAKERS

Stealth Acoustics has reconfigured its award-winning invisible speaker technologies and installed them into a thin, on-wall speaker package, with a completely flat-front radiating surface that can be finished in a wide array of options;

The *Satin White* Image II can be mounted right out of the box or finished in the field to match virtually any décor imaginable.

The *Image Wrap™* model includes high resolution images (from our artist gallery or customer provided) that are factory laminated to the speaker

face in a "studio wrap" style that turns the speaker itself into a work of art.

For a truly sweeping scene, select *The Trilogy™*. This option combines the freshly updated CoverArt with a pair of Image II speakers for an awesome panoramic three panel spread.

No other on-wall speaker gives you this flexibility in creating the exact look you need to match your aesthetic goals.

Speaker installation takes only moments with the included Slim-mount™ system. Simply use the included hollow wall anchors and mounting template for a hassle free art speaker mounting experience.

Customizable beauty is just a portion of the Image II speakers' value. Audio performance is impressive, with smooth high-frequency response, solid bass extension, excellent imaging and 170 degree dispersion.

# Image II

## TWO-WAY CUSTOMIZABLE ON-WALL LOUDSPEAKER

### Architectural & Engineering Specifications

The surface mount loudspeaker shall be a two-way, full-range, planar-front radiating device, producing frequencies from 40Hz to 20kHz. The total radiating surface shall be 333 sq. in (2148 sq. cm) and sound dispersion shall be a nominal 170 degrees in both horizontal and vertical planes. The loudspeaker system shall have a sensitivity of 80 dB, 1 watt / 1 meter, with a capacity of 200 watts RMS according to EIA standard RS-426-A. The loudspeaker shall have no grill, or other air-penetrable openings within the device, creating a totally sealed enclosure.

Speaker finish shall be based upon options specified (select; paint grade satin white, *Image Wrap™* or *The Trilogy™*). The loudspeaker shall be customized in-field using paint, select wallpapers, or fabric, as specified. *Image Wrap™* or *The Trilogy™* options, if specified, shall allow for a factory applied, high resolution image to be placed over the speaker (*The Trilogy™* option pairs the Image II speakers with a matching Stealth CoverArt system to create a 3-panel art series - see [www.stealthcoverart.com](http://www.stealthcoverart.com) for further details).

The Image II shall mount on-wall using provided Slim-mounts™ attached either directly to wall framing or by using included hollow wall anchors.

The loudspeaker shall be the Stealth Acoustics Model Image II and shall carry a 5 year manufacturer's warranty.

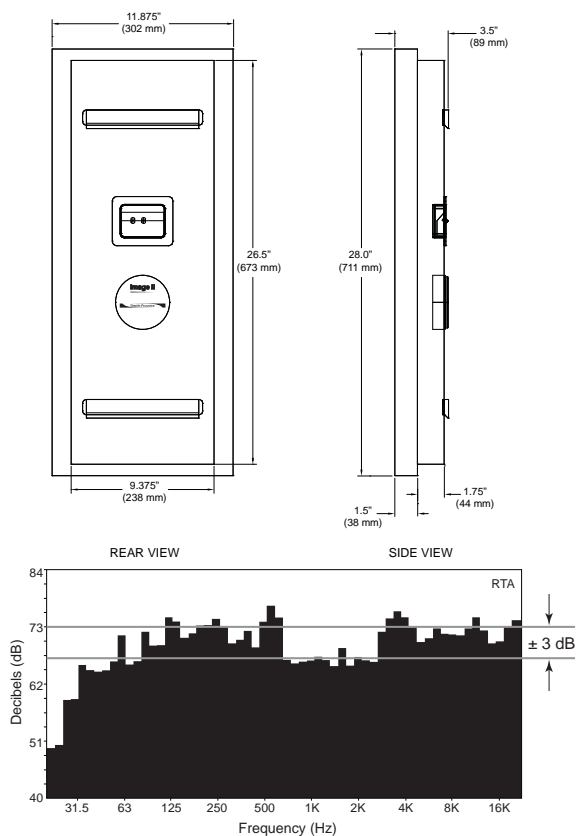


Figure 1: On-axis frequency response.

### Product Specifications

#### Frequency Response:

40Hz to 20kHz (see Figure 1)

#### Power Capacity:

200 watts RMS

80 watts minimum recommended power

#### Sensitivity:

80 dB (1 watt / 1 meter)

#### Driver Components:

High frequency: 1" (25 mm) neodymium motor

Low-frequency: 1" (25 mm) voice coil, 6" (152 mm) woofer,

Ceramic 20 oz. (622 gr) magnet

#### System Impedance:

8Ω nominal

#### Polar Dispersion:

170 degrees vertical and horizontal

#### Dimensions:

Width: 11-7/8" (302 mm)

Height: 28" (711 mm)

Depth: 3-1/4" (83 mm)

Installed Depth (including slim-mount): 3-1/2" (89 mm)

#### Product Weight:

22 lbs. (10 kg) each

#### Shipping Weight:

48 lbs. (21.3 kg) per pair

26 lbs. (11.8 kg) each

#### Included Accessories:

Slim-Mount Mounting Brackets

Hollow Wall Anchors

Mounting Screws

Terminal Wrench

#### Optional Accessories:

*Image Wrap™* Custom Images

*Stealth CoverArt™*

Stealth Acoustics SA8400 8-Channel Amplifier

Note: All specifications subject to change. CoverArt™ and

The Trilogy™ available in the USA and Canada only.

## Image Series

CUSTOMIZABLE ON-WALL SPEAKERS

**Stealth Acoustics**

A Division of Dimensional Communications, Inc.

1220 Anderson Road | Mount Vernon, WA 98274

[www.StealthAcoustics.com](http://www.StealthAcoustics.com)

Toll Free: 888.865.6800 | Fax: 360.424.8872