



Stealth Acoustics


Model AX3
Polar Response / Data

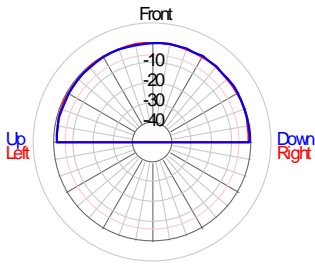


Polar Response - 2D 250Hz (and below)

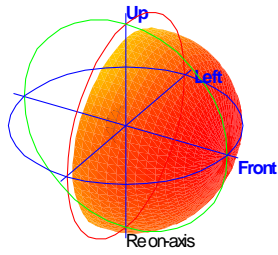


Polar Response - 3D

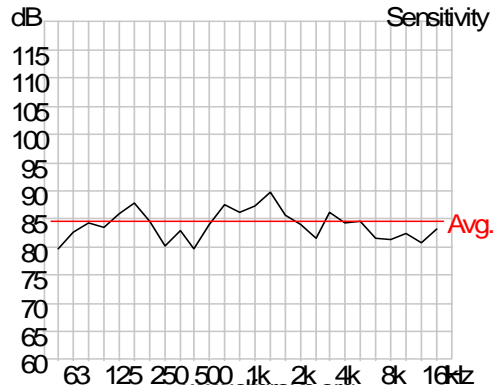


Sensitivity (1w/1m)
(Max Input V
before protection: 15Vrms)

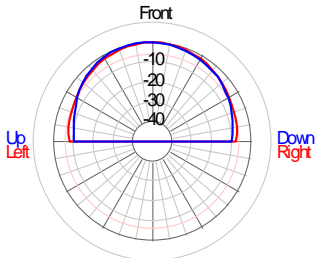


Polar Response - 2D 500Hz




Polar Response - 3D

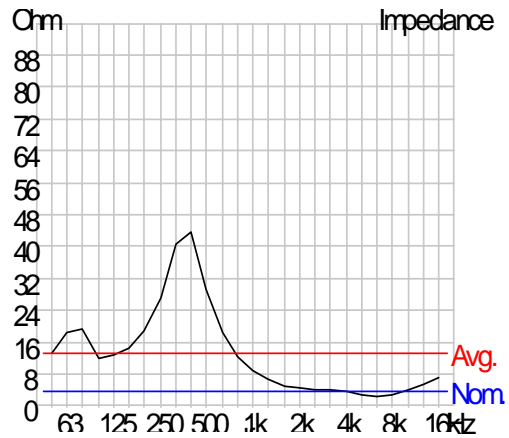


Impedance
(Rated 4 Ohms)

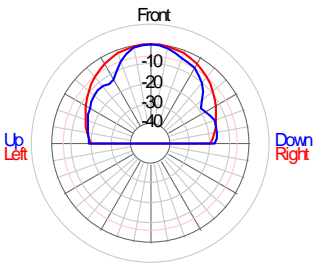


Polar Response - 2D 1KHz

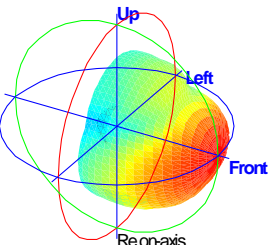


Polar Response - 3D

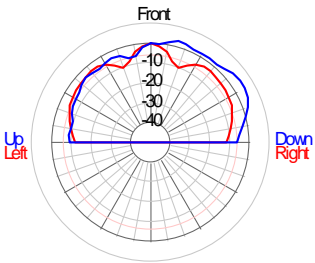


Polar Response - 2D 2KHz

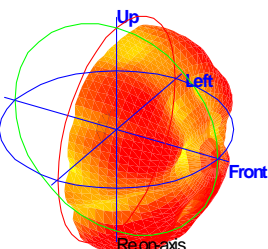


Polar Response - 3D

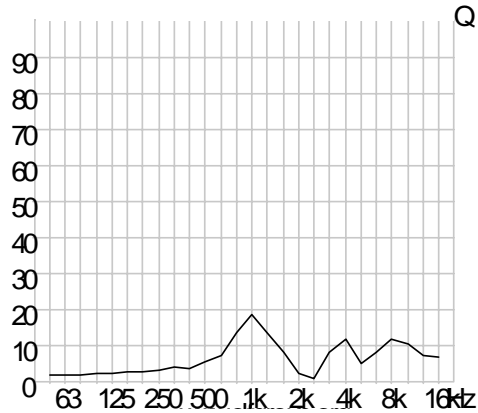

Directivity (Q)

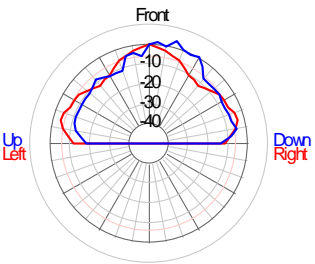

Polar Response - 2D 16KHz

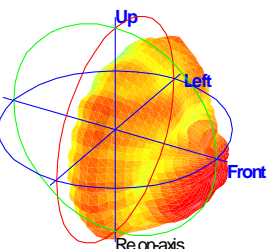

Polar Response - 3D

Complete EASE and CLF (Common Loudspeaker Format) files are available from Stealth

Stealth Acoustics

Totally Invisible Audio Solutions

Stealth Acoustics

1220 Anderson Road Mount Vernon, WA 98274
www.stealthacoustics.com (888) 865-6800