

## CUSTOMIZABLE ON-WALL DUAL 8" SUBWOOFER

### Recommended Applications:

- Matching Sub for Image III Speakers
- Surround Sound Sub / Bass
- Sound Bar Sub / Bass
- Architectural Sound Scapes

### Installation:

Installs on-wall in minutes

### Performance:

- 120 Watts RMS
- 30Hz to 160Hz (see Figure 1)
- 100W minimum recommended power

### Finish Options:

Available in three levels of finish:

1. *Satin White* - Ready to install right out of the box, or finish in the field with paint, wallpaper or fabric to perfectly match any room's décor.
2. *Image Wrap™* - Choose from our gallery of images or a customer supplied image for a professional studio-wrap over the speaker.



Front view (shown with optional Image Wrap™)



Rear view

Stealth Acoustics has enhanced its Image III on-wall art speaker line with the matching Image III Subwoofer. Dual 8" woofers drive this thin, on-wall subwoofer package, with a completely flat-front radiating surface that can be finished in a wide array of options;

The *Satin White* Image III can be mounted right out of the box or finished in the field to match virtually any décor imaginable.

The *Image Wrap™* model includes high resolution images (from our artist gallery or customer provided) that are factory laminated to the speaker face in a "studio wrap" style that turns the speaker itself into a work of art.

No other on-wall speaker gives you this flexibility in creating the exact look you need to match your aesthetic goals.

When coupled with matching Image III full range speakers, system frequency response is extended as low as 35hz, allowing an Image III system to perform as a true on-wall surround sound solution.

For a truly sweeping scene, add an Image III Sub to an Image III / CoverArt *Trilogy™*. This option

combines the Image III Sub with recently updated CoverArt and a pair of Image III speakers for an awesome sounding panoramic spread.

Or, use the Image III Sub simply to add more bass to any system.

Speaker installation takes only moments with the four key slots on the rear of the speaker. Simply use the included hollow wall anchors for a hassle free art speaker mounting experience.



The Trilogy™ - Image III Sub speakers shown with matching Stealth CoverArt™ display masking system. CoverArt™ and The Trilogy™ available in the USA and Canada only.

# Image III<sub>sub</sub> CUSTOMIZABLE ON-WALL DUAL 8" SUBWOOFER


## Architectural & Engineering Specifications

The surface mount subwoofer shall be a planar-front radiating device, producing frequencies from 30Hz to 160Hz. The total radiating surface shall be 406 sq. in (2619 sq. cm) and sound dispersion shall be a nominal 180 degrees in both horizontal and vertical planes. The subwoofer system shall have a sensitivity of 83 dB, 1 watt / 1 meter, with a capacity of 120 watts RMS according to EIA standard RS-426-A. The subwoofer shall have no grill, or other air-penetrable openings within the device, creating a totally sealed enclosure.

Speaker finish shall be based upon options specified (select; paint grade satin white, *Image Wrap™* or *The Trilogy™*). The subwoofer shall be customized in-field using paint, select wallpapers, or fabric, as specified. *Image Wrap™* or *The Trilogy™* options, if specified, shall allow for a factory applied, high resolution image to be placed over the subwoofer (*The Trilogy™* option pairs the Image III subwoofer and Image III full range speakers with a matching Stealth CoverArt system to create a multi-panel art series - see [www.stealthacoustics.com](http://www.stealthacoustics.com) for further details).

The Image III Sub shall mount on-wall using the key slots located on the rear of the speaker and be attached either directly to wall framing or by using included hollow wall anchors.

The loudspeaker shall be the Stealth Acoustics Model Image III Sub and shall carry a 5 year manufacturer's warranty.

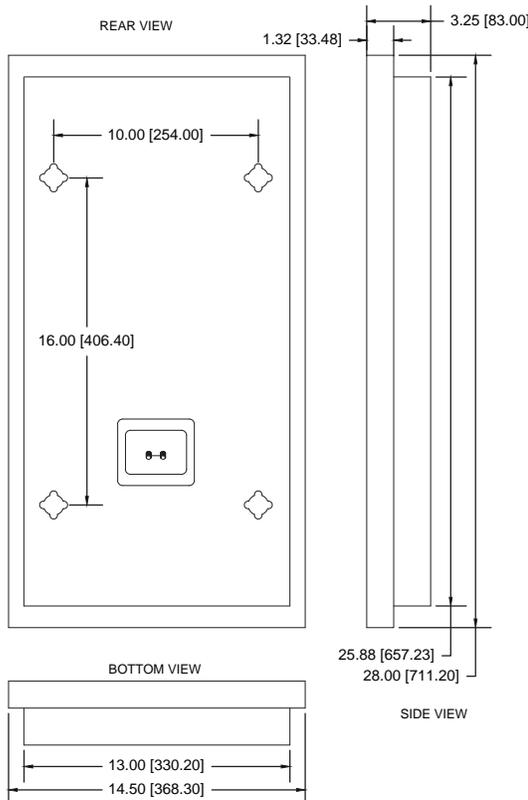

## Product Specifications

### Frequency Response:

30Hz to 160Hz (see Figure 1)

### Power Capacity:

120 watts RMS

100 watts minimum recommended power

### Sensitivity:

83 dB (1 watt / 1 meter)

### Driver Components:

(2) 8" (203 mm) woofer,

Ceramic 20 oz. (622 gr) magnet

### System Impedance:

4Ω nominal

### Polar Dispersion:

180 degrees vertical and horizontal

### Dimensions:

Width: 14-1/2" (368 mm)

Height: 28" (711 mm)

Depth: 3-1/4" (83 mm)

Installed Depth: 3-1/4" (83 mm)

### Product Weight:

23 lbs. (10.4 kg) each

### Shipping Weight:

37 lbs. (14 kg) each

### Included Accessories:

Hollow Wall Anchors

Mounting Screws

Terminal Wrench

### Optional Accessories:

*Image Wrap™* Custom Images

*Image III* Full Range On-Wall Speakers

*Stealth CoverArt™*

Stealth Acoustics SA2400MKII 2-Channel Amplifier

Note: All specifications subject to change. *CoverArt™*

*Trilogy™* is available in the USA and Canada only.

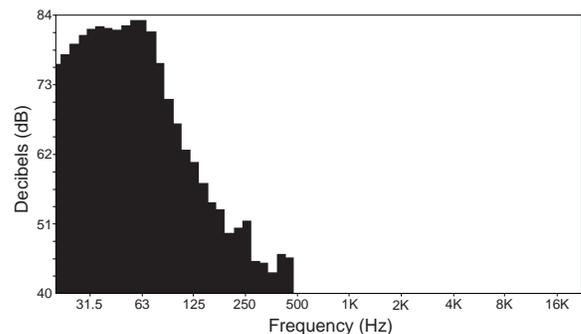


Figure 1: On-axis frequency response W/ 80Hz LPF.