

STEALTH

LR430

INVISIBLE SPEAKER

PRELIMINARY

QUAD 8" 3-WAY INVISIBLE LOUDSPEAKER
IN-WALL OR IN-CEILING



CELEBRATE
GEN 3

LINEAR RADIANCE

INVISIBLE SPEAKERS | SUBWOOFERS

Recommended Applications:

- Multi-Room Audio Systems
- Foreground Music
- Background Music
- Home Theater / Surround Sound

Recommended Installations:

Flush mounted in walls or ceilings constructed of wood or steel framing with 1/2" (13 mm) or thicker gypsum wallboard.

Min. Cavity Depth Required:

3 1/4" (83 mm) or 2 13/16" (71 mm) with back box removed.

Performance:

- 200W RMS
- 100W min. recommended power
- 35Hz to 20kHz (see Figure 1)

Protection:

Three independent self-resetting circuits (high-, mid-, and low-frequency)

On-Site Finish Options:

Finish options include latex paint, flat finish, orange peel texture, light plaster, light wallpaper, light fabric, wood veneer, and other selected approved finishes.

The Stealth Acoustics Model LR430 is a three-way, full-range loudspeaker system that becomes completely invisible after installation. The loudspeaker has a rigid frame that attaches directly to standard structural framing. The paintable active diaphragm face is bonded to the frame of the speaker panel, creating an active area surrounded by a stable mounting area. Installation instructions are shown on a paper overlay that is to be removed before installation. The overlay can also be used as a cutting template for retrofitting the speakers into existing wallboard.

The LR430 may be installed in either the wall or ceiling and on-site finishing options include latex paint, light wallpaper, fabrics and selected texture coats. There is no need for special vellums or other nonstandard wallboard finishing materials. Advanced finishing methods may be supported using special techniques.

The Stealth Acoustics LR430 incorporates an acoustically coupled high quality, low profile, high-power 8" cone woofer, a 30 mm direct coupled neomagnet mid-range driver, a direct coupled 25 mm neo-magnet high-frequency driver, and an acoustically tuned back box. Advanced internal materials allow for smooth frequency extension to 20kHz. When the LR430 is installed in standard insulated 2" x 4" framing and allowed to function in a full 8 foot stud bay, frequency response below 35Hz can be achieved. The LR430 contains three independent protection circuits (high-, mid-, and low-frequency sections) that automatically reset upon reduction of excessive amplifier power.

For proper registration, each speaker must be installed so that the surface of the perimeter edge is flush with the adjoining wallboard. When correctly in place, the surface of the speaker face panel extends

above the height of the wallboard by 1/16" (1.6 mm). This is done to allow space for the tape and joint compound needed to blend the panel into the wall. Shims are included to allow for mounting in wallboard thicker than 1/2" (13 mm).

Stealth Acoustics' invisibility offers a powerful advantage over traditional loudspeakers because they can be placed wherever they sound best, free of visual concerns that may conflict with architectural features. Accompanying the full range panels, Stealth Acoustics offers completely invisible companion subwoofers for extended low frequency response.

All Stealth Acoustics speakers are covered by a 20-year manufacturer's warranty.

LR430

INVISIBLE SPEAKER


QUAD 8" 3-WAY INVISIBLE LOUDSPEAKER IN-WALL OR IN-CEILING

Architectural & Engineering Specifications

The loudspeaker shall be a three-way, full-range device, producing frequencies from 35Hz to 20kHz. The total radiating surface shall be 326 sq. in (2,103 sq. cm). and high frequency dispersion shall be a nominal 170 degrees in both horizontal and vertical planes. The loudspeaker system shall have a sensitivity of 83 dB, 1 watt / 1 meter, with a capacity of 200 watts RMS according to EIA standard RS-426-A. The loudspeaker shall have three independent self-resetting protection devices, one for the high-, mid-, and low-frequency drivers.

The loudspeaker shall fit into walls or ceilings with standard wood or steel stud construction and a minimum cavity depth of 3/4" (83 mm) or 2 13/16" (72 mm) with back box removed. The loudspeaker shall mount directly to the structural framing and have the capability of seamlessly adjoining 1/2" (13 mm) or thicker gypsum wallboard. The minimum distance between framing members shall be 13 3/4" (349 mm) or 9 5/8" (238 mm) with back box removed. Face panel finishing methods shall be consistent with normal gypsum wallboard finishing techniques and may include latex paint, light wallpaper, light fabric, wood veneer and other selected approved finishes as specified.

The invisible loudspeaker shall be the Stealth Acoustics model LR430 and shall carry a 20-year manufacturer's warranty.

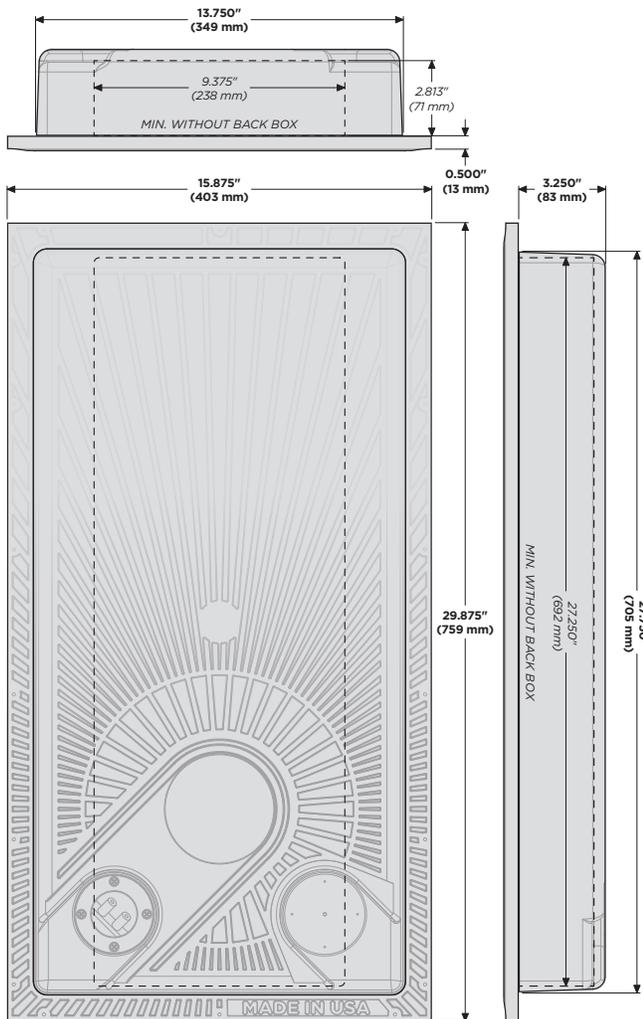

Standard Installation

Product Specifications

Frequency Response:

35Hz to 20kHz (see Figure 1)

Power Capacity:

200 watts RMS
100 watts minimum recommended power

Protection:

Three independent self-resetting devices (low-, mid-, and high-frequency)

Sensitivity:

83 dB (1 watt / 1 meter)

Driver Components:

High-frequency: 1" (25 mm) neodymium driver
Mid-frequency: 1 1/8" (30 mm) neodymium driver
Low-frequency: Two 1 1/2" (38 mm) voice coil 8" (203 mm) woofers, 20 oz. (567 gr) ceramic magnet

System Impedance:

8Ω nominal

Polar Dispersion:

170 degrees vertical and horizontal

Dimensions:

Width: 15 7/8" (403 mm)
Height: 29 7/8" (759 mm)
Mounting Depth: 3 1/4" (83 mm)
2 13/16" (71 mm) with back box removed

Product Weight:

26 lbs. (11.8 kg) each

Shipping Weight:

55 lbs. (25 kg) per pair
30 lbs. (13.6 kg) per single

Included Accessories:

Mounting shims
Mounting screws

Optional Accessories:

SA2400-MKII Stealth Acoustics High Current 2-Channel Amplifier with DS
PS-30 PlaceSaver™
MBX-30 UL Listed Metal Back Box
MBA-30 UL Listed Metal Back Box - Adjustable
MBC-30 Concrete Back Box
SK-1 Shim Kit

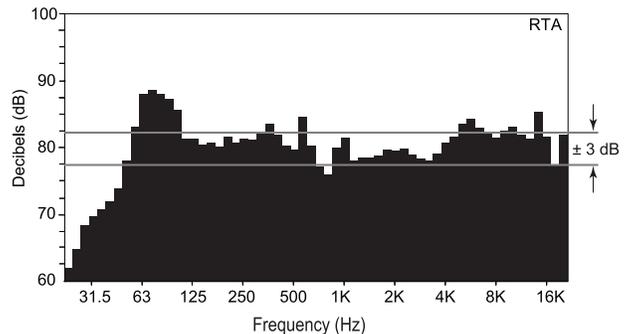


Figure 1: On-axis frequency response in standard stud wall with four coats of latex paint applied to the speaker face panel.